

NEW

SHERPA MONOBLOC

S2

041-K028-01
041-K028-02



Compatible with:
SIOS
CONTROL

Monoblock heat pump



COMPACT TECHNOLOGY

Compact unit and reduced dimensions. For all power sizes the machine is equipped with a single fan unit.



DOMESTIC HOT WATER UP TO 60°C

Sherpa supplies Domestic Hot Water with temperatures up to 60°C.



LOW GWP GAS

All power sizes use the R32 refrigerant, characterised by greater efficiency and a greenhouse effect reduced by almost 70% (compared to R410A).




FEATURES

- **Air-water heat pump inverter**
- **Energy efficiency class** in heating moderate climate: A+++ (35°C) e A++ (55°C)
- **Power available:** 9 versions with R32 refrigerant single-phase (6-8-10-12-14-16 kW) three-phase power supplies (12-14-16 kW)
- **DHW production:** up to 60°C
- **Compressor:** twin rotary DC.
- **Expansion valve:** electronic.
- **Fan** with brushless DC motor.
- **Standard supply remote touchscreen control panel** (connection cable up to 50 m not included). Integrated Wi-Fi module for controlling the machine via smartphone and table, with relevant app (Comfort Home)
- **Refrigerant gas:** R32*
- **Operating limits:** up to -25°C, +43°C (see technical manuals for details)
- **External air probe** integrated in the machine.
- **Domestic Hot Water storage tank probe:** standard supply with the machine.
- **Cascade management:** up to 6 units can be connected (of the same size), 1 Master and 5 Slaves (only the Master unit can produce domestic hot water).

* Equipment hermetically sealed containing fluorinated gases with an equivalent GWP of 675 (R32)



LAYOUT, DIMENSIONS, WEIGHT

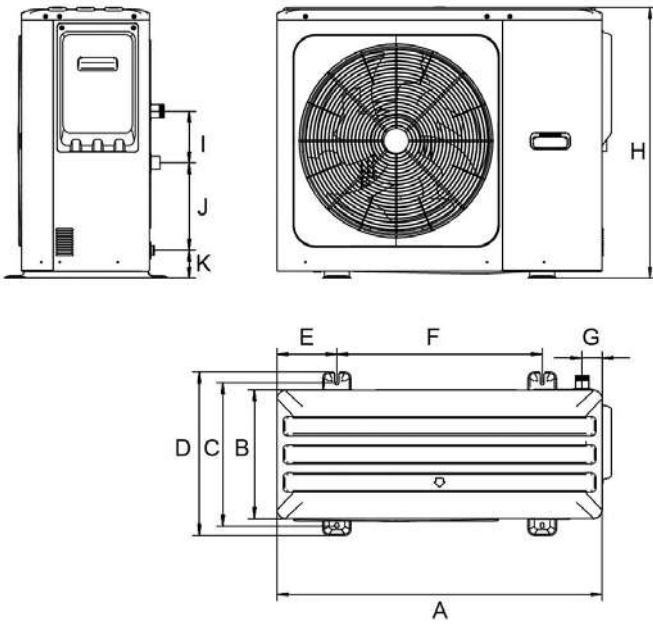

| | | 6 | 8 | 10 | 12 | 14 | 16 | 12T | 14T | 16T |
|----------------|----|------|------|------|------|------|------|------|------|------|
| MONDFAN | | | | | | | | | | |
| A | mm | 1040 | 1040 | 1040 | 1040 | 1040 | 1040 | 1040 | 1040 | 1040 |
| B | mm | 410 | 410 | 410 | 410 | 410 | 410 | 410 | 410 | 410 |
| C | mm | 458 | 458 | 458 | 458 | 458 | 458 | 458 | 458 | 458 |
| D | mm | 523 | 523 | 523 | 523 | 523 | 523 | 523 | 523 | 523 |
| E | mm | 191 | 191 | 191 | 191 | 191 | 191 | 191 | 191 | 191 |
| F | mm | 656 | 656 | 656 | 656 | 656 | 656 | 656 | 656 | 656 |
| G | mm | 64 | 64 | 64 | 64 | 64 | 64 | 64 | 64 | 64 |
| H | mm | 865 | 865 | 865 | 865 | 865 | 865 | 865 | 865 | 865 |
| I | mm | 165 | 165 | 165 | 165 | 165 | 165 | 165 | 165 | 165 |
| J | mm | 279 | 279 | 279 | 279 | 279 | 279 | 279 | 279 | 279 |
| K | mm | 89 | 89 | 89 | 89 | 89 | 89 | 89 | 89 | 89 |
| Weight | kg | 87 | 87 | 87 | 106 | 106 | 106 | 120 | 120 | 120 |


CASCADING

Cascading of up to 6 units. System power up to 96 kW.



REMOTE CONTROL VIA APP COMFORT HOME

The heat pump can be controlled remotely with Tablet and Smartphone thanks to the standard Wi-Fi module (to be interfaced with a wireless router connected to the Internet). The "Comfort Home" App can be downloaded free of charge from the Google and Apple Stores, which allows control of the machine via the Cloud.



| TECHNICAL DATA | | | | 6 | | 8 | | 10 | | 12 | | 14 | | 16 | |
|--|-------------------|------|---------|--------------|------|-------------|--------------|-------------|-------|--------------|------|-------------|--------------|-------------|--------------|
| | | | | 02303 | | 02304 | | 02305 | | 02306 | | 02307 | | 02308 | |
| Sherpa Monobloc S2 E | | | | Min | Nom | Max | Min | Nom | Max | Min | Nom | Max | Min | Nom | Max |
| Compressor frequency | | | | | | | | | | | | | | | |
| Heating power | a7/6 - w30/35 | (a) | kW | - | 6,5 | 8,47 | - | 8,4 | 9,56 | - | 10 | 11,16 | - | 12,2 | 13,42 |
| COP | a7/6 - w30/35 | (a) | W/W | - | 5,3 | - | - | 5,05 | - | - | 4,7 | - | - | 4,9 | - |
| Heating power | a2/l - w30/35 | (b) | kW | - | 5,6 | 7,64 | - | 7,1 | 8,52 | - | 8,2 | 9,94 | - | 12,3 | 12,3 |
| COP | a2/l - w30/35 | (b) | W/W | - | 4,2 | - | - | 3,95 | - | - | 3,8 | - | - | 3,6 | - |
| Heating power | a-7/-8 - w30/35 | (c) | kW | - | 6,2 | 6,67 | - | 7,1 | 7,65 | - | 8 | 8,4 | - | 11,6 | 12,1 |
| COP | a-7/-8 - w30/35 | (c) | W/W | - | 3,2 | - | - | 3,15 | - | - | 3 | - | - | 2,85 | - |
| Heating power | a-15/-16 - w30/35 | (d) | kW | - | 5,59 | 5,59 | - | 6,07 | 6,07 | - | 6,48 | 6,48 | - | 10,35 | 10,35 |
| COP | a-15/-16 - w30/35 | (d) | W/W | - | 2,58 | - | - | 2,54 | - | - | 2,5 | - | - | 2,39 | - |
| Heating power (fancoils) | a7/6 - w40/45 | (f) | kW | - | 6,6 | 8,14 | - | 8,5 | 9,28 | - | 10,2 | 10,87 | - | 12,5 | 13,14 |
| COP (fancoils) | a7/6 - w40/45 | (f) | W/W | - | 4 | - | - | 3,8 | - | - | 3,65 | - | - | 3,7 | - |
| Heating power (fancoils) | a2/l - w40/45 | (g) | kW | - | 6,5 | 7,03 | - | 7,5 | 8,22 | - | 8,5 | 9,42 | - | 12 | 12 |
| COP (fancoils) | a2/l - w40/45 | (g) | W/W | - | 3,15 | - | - | 3,05 | - | - | 2,95 | - | - | 2,9 | - |
| Heating power (fancoils) | a-7/-8 - w40/45 | (h) | kW | - | 6,1 | 6,47 | - | 6,8 | 7,43 | - | 7,4 | 8,16 | - | 11,5 | 11,5 |
| COP (fancoils) | a-7/-8 - w40/45 | (h) | W/W | - | 2,6 | - | - | 2,5 | - | - | 2,4 | - | - | 2,3 | - |
| Heating power (fancoils) | a-15/-16 - w40/45 | (i) | kW | - | 5,45 | 5,45 | - | 5,92 | 5,92 | - | 6,33 | 6,33 | - | 9,62 | 9,62 |
| COP (fancoils) | a-15/-16 - w40/45 | (i) | W/W | - | 2,23 | - | - | 2,2 | - | - | 2,14 | - | - | 2,11 | - |
| Cooling power | a35 - w23/18 | (l) | kW | - | 6,5 | 9,27 | - | 8,3 | 10,31 | - | 10 | 10,31 | - | 12,2 | 16,11 |
| EER | a35 - w23/18 | (l) | W/W | - | 5,1 | - | - | 4,85 | - | - | 4,3 | - | - | 4,6 | - |
| Cooling power (fancoils) | a35 - w12/7 | (m) | kW | - | 5,5 | 6,84 | - | 7,4 | 8,66 | - | 9 | 9 | - | 11,6 | 13,44 |
| EER (fancoils) | a35 - w12/7 | (m) | W/W | - | 3,25 | - | - | 3,15 | - | - | 2,9 | - | - | 3,1 | - |
| Energy efficiency class in water heating 35°C | Warmer Climate | | | A+++ | | A+++ | | A+++ | | A+++ | | A+++ | | A+++ | |
| SCOP | Warmer Climate | | | 6,78 | | | 6,94 | | | 7,05 | | | 6,63 | | 6,59 |
| s (Seasonal efficiency for space heating) | Warmer Climate | ηs % | | 268,2 | | | 274,7 | | | 279,1 | | | 262,3 | | 260,5 |
| Energy efficiency class in water heating 35°C | Average Climate | | | A+++ | | A+++ | | A+++ | | A+++ | | A+++ | | A+++ | |
| SCOP | Average Climate | | | 5,12 | | | 5,17 | | | 5,12 | | | 5,08 | | 4,89 |
| s (Seasonal efficiency for space heating) | Average Climate | ηs % | | 201,8 | | | 204 | | | 201,9 | | | 200,1 | | 192,5 |
| Energy efficiency class in water heating 35°C | Cold Climate | | | A+++ | | A+++ | | A+++ | | A+++ | | A+++ | | A+++ | |
| SCOP | Cold Climate | | | 4,41 | | | 4,44 | | | 4,44 | | | 4,3 | | 4,36 |
| s (Seasonal efficiency for space heating) | Cold Climate | ηs % | | 173,4 | | | 174,6 | | | 174,6 | | | 168,8 | | 171,3 |
| Energy efficiency class in water heating 55°C | Warmer Climate | | | A++ | | A++ | | A++ | | A++ | | A++ | | A++ | |
| SCOP | Warmer Climate | | | 4,35 | | | 4,71 | | | 4,91 | | | 4,55 | | 4,69 |
| s (Seasonal efficiency for space heating) | Warmer Climate | ηs % | | 170,9 | | | 185,3 | | | 193,4 | | | 179 | | 184,6 |
| Energy efficiency class in water heating 55°C | Average Climate | | | A++ | | A++ | | A++ | | A++ | | A++ | | A++ | |
| SCOP | Average Climate | | | 3,59 | | | 3,67 | | | 3,71 | | | 3,62 | | 3,62 |
| s (Seasonal efficiency for space heating) | Average Climate | ηs % | | 140,7 | | | 143,6 | | | 145,5 | | | 141,6 | | 141,8 |
| Energy efficiency class in water heating 55°C | Cold Climate | | | A++ | | A++ | | A++ | | A++ | | A++ | | A++ | |
| SCOP | Cold Climate | | | 2,9 | | | 3,02 | | | 3,14 | | | 3,23 | | 3,24 |
| s (Seasonal efficiency for space heating) | Cold Climate | ηs % | | 113,1 | | | 117,7 | | | 122,4 | | | 126 | | 126,6 |
| Indoor unit sound power | | | dB(A) | - | | | - | | | - | | | - | | - |
| Indoor unit sound pressure | | (n) | dB(A) | - | | | - | | | - | | | - | | - |
| Outdoor unit sound power (nominal) | | | dB(A) | 60 | | | 63 | | | 65 | | | 70 | | 72 |
| Outdoor unit sound pressure (nominal) | | (o) | dB(A) | 48 | | | 51 | | | 53 | | | 56 | | 58 |
| System circulator absorption | | | W | 4-95 | | | 4-95 | | | 4-95 | | | 4-95 | | 4-95 |
| Supply voltage indoor unit | | | V/ph/Hz | - | | | - | | | - | | | - | | - |
| Maximum absorbed current of the internal unit with active heating elements | | | A | - | | | - | | | - | | | - | | - |
| Internal unit maximum power consumption with active heating elements | | | kW | - | | | - | | | - | | | - | | - |
| Additional electric heating elements | | | kW | - | | | - | | | - | | | - | | - |
| Supply voltage outdoor unit | | | V/ph/Hz | 220-240/l/50 | | | 220-240/l/50 | | | 220-240/l/50 | | | 220-240/l/50 | | 220-240/l/50 |
| Outdoor unit maximum absorbed current | | | A | 13 | | | 14,5 | | | 16 | | | 25 | | 26,5 |
| Outdoor unit maximum absorbed power | | | kW | 3,2 | | | 3,5 | | | 3,8 | | | 5,8 | | 6,2 |
| Compressor type | | | | TWIN ROTARY | | TWIN ROTARY | | TWIN ROTARY | | TWIN ROTARY | | TWIN ROTARY | | TWIN ROTARY | |
| Refrigerant inlet connection diameter | | | " | - | | - | | - | | - | | - | | - | |
| Coolant gas | | (p) | | R32 | | R32 | | R32 | | R32 | | R32 | | R32 | |
| Global warming potential | | | GWP | 675 | | 675 | | 675 | | 675 | | 675 | | 675 | |
| Refrigerant gas charge | | | kg | 1,25 | | 1,25 | | 1,25 | | 1,8 | | 1,8 | | 1,8 | |
| Refrigerant piping length limit without minimum surface check according to IEC 60335-2-40:2018 | | (q) | | - | | - | | - | | - | | - | | - | |
| Hydraulic connections | | | " | G1 BSP | | G1 BSP | | G1 BSP | | G5/4 BSP | | G5/4 BSP | | G5/4 BSP | |
| Capacity of expansion vessel | | | l | 5 | | 5 | | 5 | | 5 | | 5 | | 5 | |

(a) Heating mode, external air temperature 7°C b.s./6°C b.u., inlet/outlet water temperature 30°C/35°C
(b) Heating mode, external air temperature 2°C b.s./1°C b.u., inlet/outlet water temperature 30°C/35°C
(c) Heating mode, external air temperature -7°C b.s./-8°C b.u., inlet/outlet water temperature 30°C/35°C
(d) Heating mode, external air temperature -15°C b.s./-16°C b.u., inlet/outlet water temperature 30°C/35°C
(f) Heating mode, external air temperature 7°C b.s./6°C b.u., inlet/outlet water temperature 40°C/45°C
(g) Heating mode, external air temperature 2°C b.s./1°C b.u., inlet/outlet water temperature 40°C/45°C
(h) Heating mode, external air temperature -7°C b.s./-8°C b.u., inlet/outlet water temperature 40°C/45°C
(i) Heating mode, external air temperature -15°C b.s./-16°C b.u., inlet/outlet water temperature 40°C/45°C
(l) Cooling mode, external air temperature 35°C, inlet/outlet water temperature 23°C/18°C

(m) Cooling mode, external air temperature 35°C, inlet/outlet water temperature 12°C/7°C
(n) Sound pressure values measured at a distance of 1 m in a semi-anechoic chamber
(o) Sound pressure values measured at a distance of 1 m in a semi-anechoic chamber
(p) Airtightlly sealed equipment containing fluorinated GAS
(q) maximum length of the refrigeration pipes beyond which checks on the minimum surface of the installation rooms are necessary, check the technical manual

| TECHNICAL DATA | | | | 12T | | | 14T | | | 16T | | | | | |
|---|--|---|-----------------|-------|-------------|---------|---------|-------------|--------------|-------|-------------|--------------|-------|--|--|
| Sherpa Monobloc S2 E | | | | 02309 | | | 02310 | | | 02311 | | | | | |
| Compressor frequency | | | | Min | Nom | Max | Min | Nom | Max | Min | Nom | Max | | | |
| PUNCTUAL PERFORMANCE | Heating power | a7/6 - w30/35 | (a) | kW | - | 12,2 | 13,42 | - | 14,1 | 15,27 | - | 16 | 18,23 | | |
| | COP | a7/6 - w30/35 | (a) | W/W | - | 4,9 | - | - | 4,7 | - | - | 4,5 | - | | |
| | Heating power | a2/1 - w30/35 | (b) | kW | - | 12,3 | 12,3 | - | 13 | 13,56 | - | 14,5 | 14,76 | | |
| | COP | a2/1 - w30/35 | (b) | W/W | - | 3,6 | - | - | 3,5 | - | - | 3,25 | - | | |
| | Heating power | a-7/-8 - w30/35 | (c) | kW | - | 11,6 | 12,1 | - | 12,5 | 13,2 | - | 13,5 | 14,1 | | |
| | COP | a-7/-8 - w30/35 | (c) | W/W | - | 2,85 | - | - | 2,8 | - | - | 2,7 | - | | |
| | Heating power | a-15/-16 - w30/35 | (d) | kW | - | 10,35 | 10,35 | - | 11,22 | 11,22 | - | 11,82 | 11,82 | | |
| | COP | a-15/-16 - w30/35 | (d) | W/W | - | 2,39 | - | - | 2,35 | - | - | 2,22 | - | | |
| | Heating power (fancoils) | a7/6 - w40/45 | (f) | kW | - | 12,5 | 13,14 | - | 14,5 | 14,87 | - | 16,2 | 18,07 | | |
| | COP (fancoils) | a7/6 - w40/45 | (f) | W/W | - | 3,7 | - | - | 3,55 | - | - | 3,45 | - | | |
| | Heating power (fancoils) | a2/1 - w40/45 | (g) | kW | - | 12 | 12 | - | 13 | 13,28 | - | 14,3 | 14,74 | | |
| | COP (fancoils) | a2/1 - w40/45 | (g) | W/W | - | 2,9 | - | - | 2,8 | - | - | 2,7 | - | | |
| | Heating power (fancoils) | a-7/-8 - w40/45 | (h) | kW | - | 11,5 | 11,5 | - | 12,5 | 12,5 | - | 13,5 | 13,5 | | |
| | COP (fancoils) | a-7/-8 - w40/45 | (h) | W/W | - | 2,4 | - | - | 2,3 | - | - | 2,25 | - | | |
| | Heating power (fancoils) | a-15/-16 - w40/45 | (i) | kW | - | 9,62 | 9,62 | - | 10,3 | 10,3 | - | 10,96 | 10,96 | | |
| | COP (fancoils) | a-15/-16 - w40/45 | (i) | W/W | - | 2,11 | - | - | 2,07 | - | - | 1,98 | - | | |
| | Cooling power | a35 - w23/18 | (l) | kW | - | 12,2 | 16,11 | - | 13,9 | 17,13 | - | 15,4 | 17,13 | | |
| | EER | a35 - w23/18 | (l) | W/W | - | 4,6 | - | - | 4,4 | - | - | 4,2 | - | | |
| | Cooling power (fancoils) | a35 - w12/7 | (m) | kW | - | 11,6 | 13,44 | - | 13,4 | 15,48 | - | 14 | 16,01 | | |
| | EER (fancoils) | a35 - w12/7 | (m) | W/W | - | 3,1 | - | - | 2,93 | - | - | 2,9 | - | | |
| | EFFICIENCIES | Energy efficiency class in water heating 35°C | Warmer Climate | | | A+++ | | | A+++ | | | A+++ | | | |
| | | SCOP | Warmer Climate | | | 6,64 | | | 6,59 | | | 6,46 | | | |
| | | s (Seasonal efficiency for space heating) | Warmer Climate | ηs % | | 262,5 | | | 260,6 | | | 255,5 | | | |
| | | Energy efficiency class in water heating 35°C | Average Climate | | | A+++ | | | A+++ | | | A+++ | | | |
| SCOP | | Average Climate | | | 5,08 | | | 4,89 | | | 4,84 | | | | |
| s (Seasonal efficiency for space heating) | | Average Climate | ηs % | | 200,2 | | | 192,5 | | | 190,5 | | | | |
| Energy efficiency class in water heating 35°C | | Cold Climate | | | A+++ | | | A+++ | | | A+++ | | | | |
| SCOP | | Cold Climate | | | 4,3 | | | 4,36 | | | 4,35 | | | | |
| s (Seasonal efficiency for space heating) | | Cold Climate | ηs % | | 168,8 | | | 171,3 | | | 170,9 | | | | |
| Energy efficiency class in water heating 55°C | | Warmer Climate | | | A++ | | | A++ | | | A++ | | | | |
| SCOP | | Warmer Climate | | | 4,55 | | | 4,69 | | | 4,68 | | | | |
| s (Seasonal efficiency for space heating) | | Warmer Climate | ηs % | | 179 | | | 184,6 | | | 184 | | | | |
| Energy efficiency class in water heating 55°C | | Average Climate | | | A++ | | | A++ | | | A++ | | | | |
| SCOP | | Average Climate | | | 3,62 | | | 3,62 | | | 3,59 | | | | |
| s (Seasonal efficiency for space heating) | | Average Climate | ηs % | | 141,6 | | | 141,8 | | | 140,7 | | | | |
| Energy efficiency class in water heating 55°C | | Cold Climate | | | A++ | | | A++ | | | A++ | | | | |
| SCOP | | Cold Climate | | | 3,23 | | | 3,24 | | | 3,18 | | | | |
| s (Seasonal efficiency for space heating) | | Cold Climate | ηs % | | 126 | | | 126,6 | | | 124,3 | | | | |
| NOISE LEVEL | | Indoor unit sound power | | | | dB(A) | | | - | | | - | | | |
| | | Indoor unit sound pressure | (n) | | | dB(A) | | | - | | | - | | | |
| | | Outdoor unit sound power (nominal) | | | | dB(A) | | | 70 | | | 72 | | | |
| | | Outdoor unit sound pressure (nominal) | (o) | | | dB(A) | | | 57 | | | 59 | | | |
| | | System circulator absorption | | | | | W | | | 4-95 | | | 4-95 | | |
| | | Supply voltage indoor unit | | | | | V/ph/Hz | | | - | | | - | | |
| | Maximum absorbed current of the internal unit with active heating elements | | | | | A | | | - | | | - | | | |
| | Internal unit maximum power consumption with active heating elements | | | | | kW | | | - | | | - | | | |
| | Additional electric heating elements | | | | | kW | | | - | | | - | | | |
| | Supply voltage outdoor unit | | | | | V/ph/Hz | | | 380-415/3/50 | | | 380-415/3/50 | | | |
| | Outdoor unit maximum absorbed current | | | | | A | | | 9,5 | | | 10,5 | | | |
| | Outdoor unit maximum absorbed power | | | | | kW | | | 5,8 | | | 6,2 | | | |
| ELECTRICAL DATA | Compressor type | | | | TWIN ROTARY | | | TWIN ROTARY | | | TWIN ROTARY | | | | |
| | Refrigerant inlet connection diameter | | | | " | | | - | | | - | | | | |
| | Coolant gas | (p) | | | R32 | | | R32 | | | R32 | | | | |
| | Global warming potential | | | | | GWP | | | 675 | | | 675 | | | |
| | Refrigerant gas charge | | | | | kg | | | 1,8 | | | 1,8 | | | |
| | Refrigerant piping length limit without minimum surface check according to IEC 60335-2-40:2018 | (q) | | | | - | | | - | | | - | | | |
| | Hydraulic connections | | | | | " | | | G5/4 BSP | | | G5/4 BSP | | | |
| | Capacity of expansion vessel | | | | | l | | | 5 | | | 5 | | | |
| | HYDRAULIC DATA | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | |

ACCESSORIES

| | | | |
|------------------------|-------|-------------------------------------|---|
| STORAGE TANKS / PUFFER | B0916 | Kit 3-way valve for DHW | ○ |
| | 01804 | HE 200 L storage tank | ○ |
| | 01805 | HE 300 L storage tank | ○ |
| | 01806 | HES 300 L solar storage tank | ○ |
| | 01807 | Hybride boiler HY 300 L | ○ |
| | 01808 | HYS 300 L solar hybrid storage tank | ○ |
| | B0618 | Resistance for boiler 2 kW | ○ |
| | B0666 | Resistance for boiler 3 kW | ○ |
| | B0617 | Resistance flange kit | ○ |
| | 01199 | Thermal accumulation 50 L | ○ |
| | 01200 | Thermal accumulation 100 L | ○ |

○ Optional accessory | ● Standard accessory | — Accessory not compatible

Accessory description on page 56

Please note that optional accessories are available for purchase with all models of the heat pump. When compatibility is only possible with certain sizes, the information is shown in the table. Standard accessories are already included in the heat pump code.